


HornTrigger Installation



Spacers go between horn button and contact point (if needed)

1. First, secure your clutch bracket to the handle to prevent any paint damage.
2. Unscrew the 2 clutch bracket bolts.
3. Install the HornTrigger on top of the bracket using the same 2 bolts. **Do not over tighten (7-9Nm torque).**

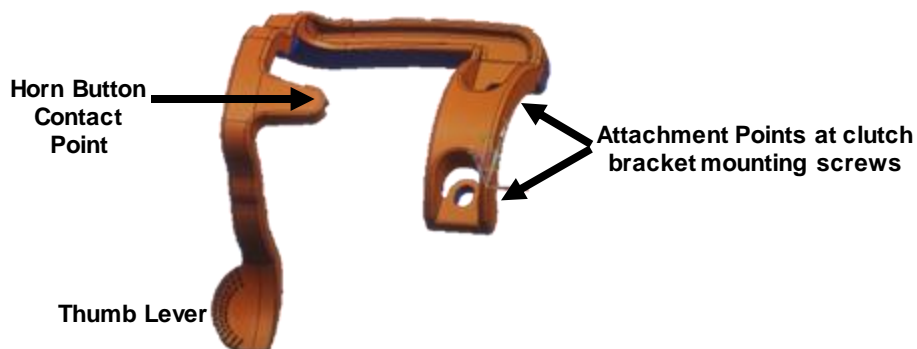

4. If you want your horn to sound faster (more sensitivity) install one of the Spacers at the Contact Point.
5. If your horn sounds as soon as you install the HornTrigger, then insert washers under the Attachment Points. This will create more space between your horn button and the Contact Point.



6. You can adjust the Thumb Lever reach by rotating the left switch assembly.
7. Relocating your accessory bracket (phone or cup holder) to the right handle will make it easier to install the HornTrigger.

Download this sheet and get more info at:

www.horntrigger.com

For a chance to win 2 free sets, post a review on social media or Harley forums*

Contact us at horntrigger@gmail.com

Follow and comment on:



**All feedback comments and contents may be used for advertising purposes.*

All copyrights, brand names, trademarks, and registered trademarks used are the property of their respective holders. No infringement of any kind is intended by the seller.

HornTrigger and LifeSaverHorn are accessories for the Harley-Davidson® OEM horn button and do not replace the horn button.

The seller does not take any responsibilities for damages, injuries, or deaths resulting from the improper installation or operation of the HornTrigger and LifeSaverHorn.

HornTrigger

THE **NEW AND IMPROVED** QUICK AND PERFECT FIX FOR THE HARD TO REACH HARLEY® HORN BUTTON



- Work the clutch lever and horn button at the same time
- Maintain a secure grip, with more grip space
- Simply installs at the clutch retaining screws
- No adjustments needed
- Available in chrome and matte black

HORNTRIGGER.COM